



<b>Model</b>	CR17450 A
<b>System</b>	Manganese Dioxide-Li/Organic Electrolyte
<b>Nominal Voltage (V)</b>	3
<b>Nominal Capacity (mAh)*</b>	2500
<b>Nominal Discharge Current (mA)</b>	5
<b>Operating Temperature Range (deg. C)</b>	-40 to +85
<b>Weight (g)**</b>	22
<b>Dimensions (mm)**</b>	
<b>Diameter</b>	17
<b>Height</b>	45
<b>UL Recognition</b>	MH12568
<b>(User Replaceable)</b>	

## Characteristics


### ● Discharge Characteristics

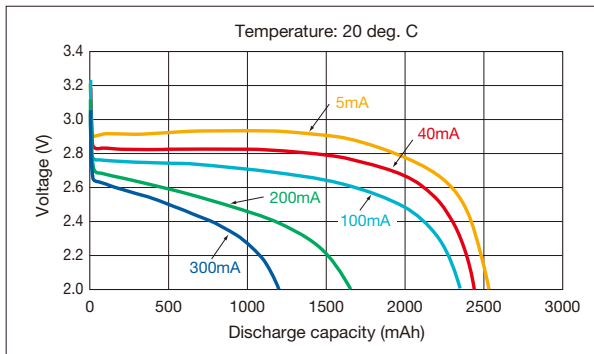


### ● Temperature Characteristics

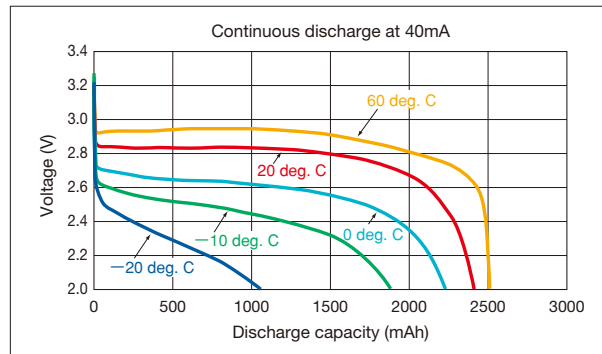

### ● Pulse Discharge Characteristics

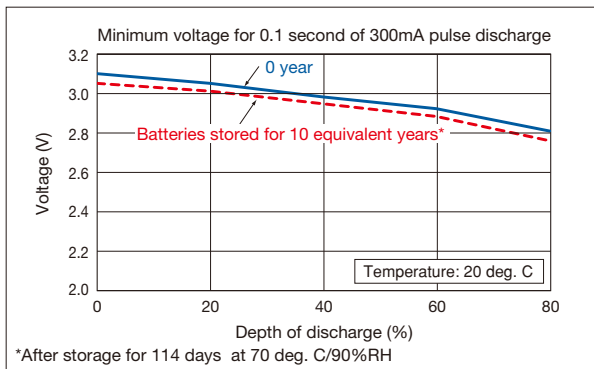

### ● Storage Characteristics

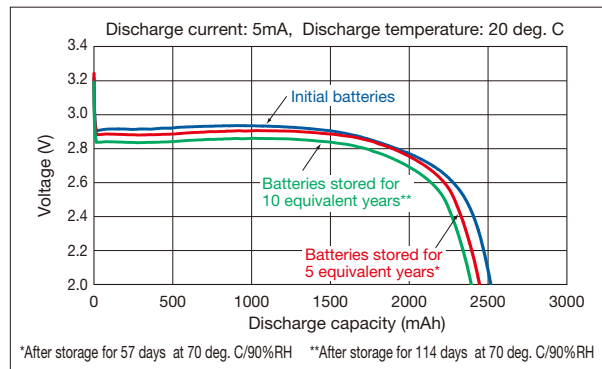

\* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.

\*\* Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.