



Model	CR17335A
System	Manganese Dioxide-Li/Organic Electrolyte
Nominal Voltage (V)	3
Nominal Capacity (mAh)*	1650
Nominal Discharge Current (mA)	5
Operating Temperature Range (deg. C)**	-40 to +85
Weight (g)***	17
Dimensions (mm)***	
Diameter	17
Height	33.5
UL Recognition	MH12568
(User Replaceable)	

Characteristics


● Discharge Characteristics

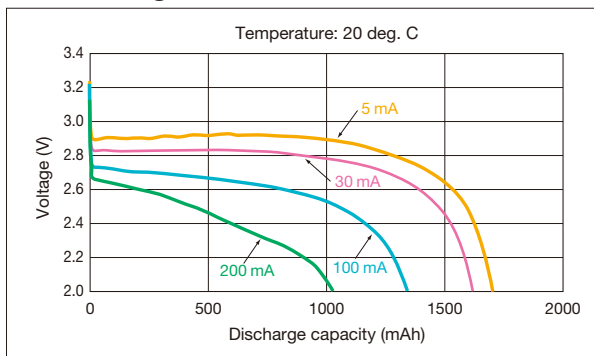


● Temperature Characteristics

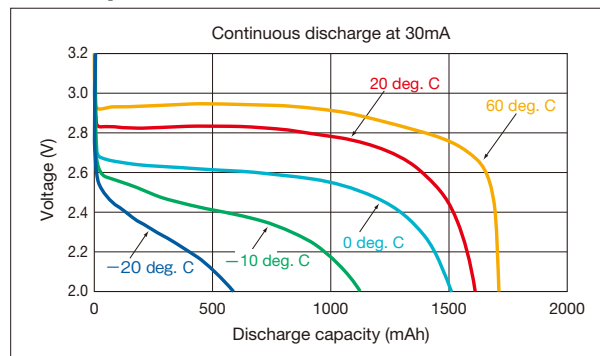

● Pulse Discharge Characteristics

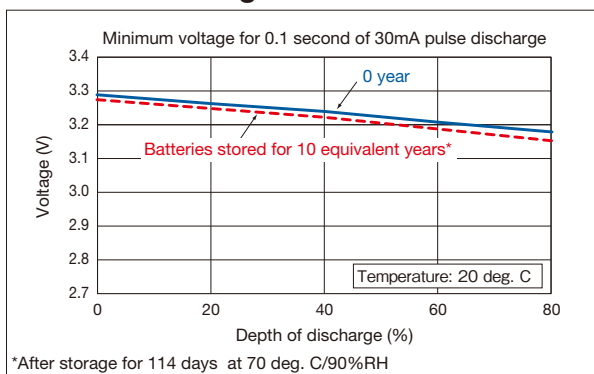

● Storage Characteristics

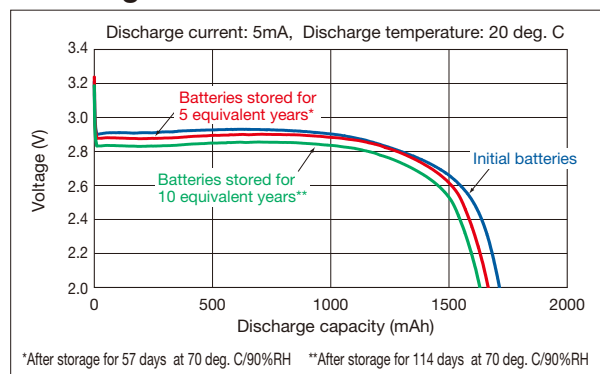

* Nominal capacity indicates duration until the voltage drops to 2.0V when discharged at a nominal discharge current at 20 deg. C.

** When using at temperatures exceeding 60 deg. C, please consult Maxell in advance for conditions of use.

*** Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.