



Model		CLB2032
Initial dimensions (mm) <sup>*1</sup>	Diameter	20
	Height <sup>*2</sup>	3.45
Weight (g) <sup>*1</sup>		3.0
Charge (CCCV)	Max. voltage (V)	4.2
	Standard current (mA)	35
	Temperature (deg. C)	0 to +45
Discharge (CC)	End voltage (V)	3.0
	Max. current (mA)	140
	Temperature (deg. C)	-20 to +60
Nominal voltage (V)		3.7
Nominal capacity (mAh) <sup>*3</sup>		70

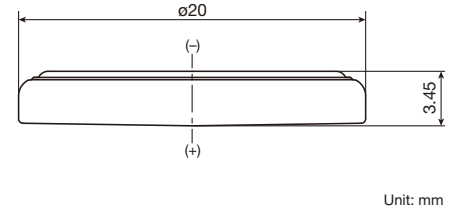


- UL 1642 Recognized models (Technician Replaceable): Certification Number: MH12568
- IEC 62133-2 Recognized models
- UN 38.3 (Dangerous goods transportation regulations) Recognized models

## Characteristics


### ● Charge characteristics

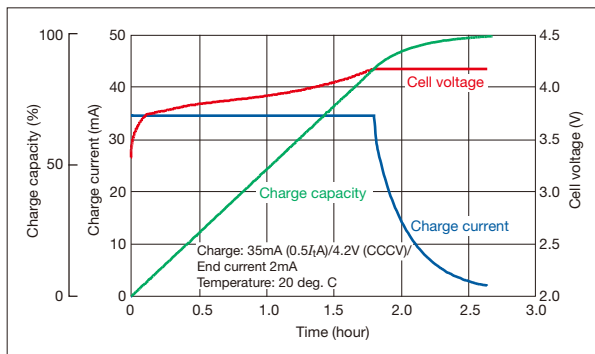


### ● Discharge temperature characteristics

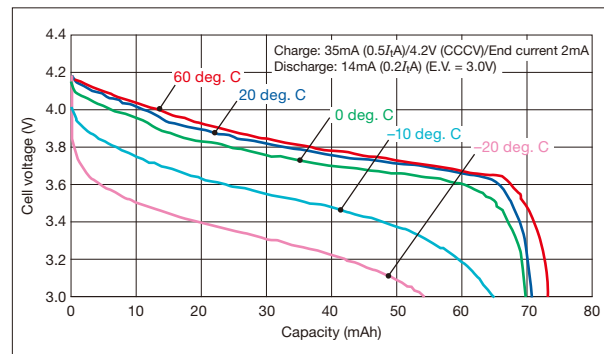

### ● Discharge load characteristics

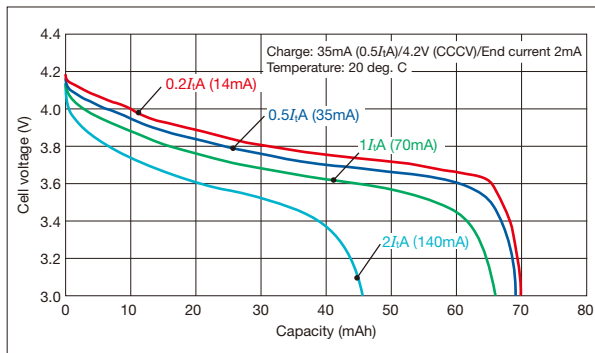

### ● Cycle life characteristics

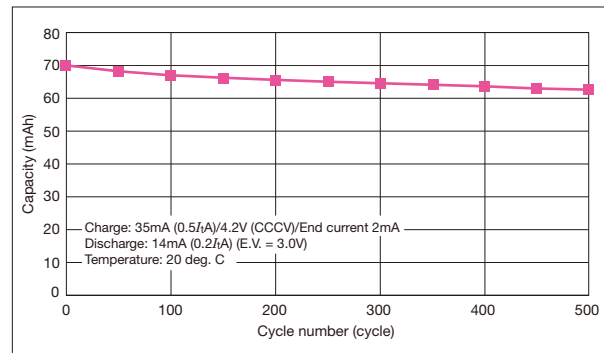

\*1 Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.

\*2 100% charged

\*3 Nominal capacity is according to the following conditions: Charge: 0.5I<sub>t</sub>/A/4.2V (CCCV)/End current 0.03I<sub>t</sub>/A, Discharge: 0.2I<sub>t</sub>/A/E.V. = 3.0V, Temperature 20 deg. C