



ML2016H

Model	ML2016H
System	Li-Al Alloy Manganese Dioxide/Organic Electrolyte
Nominal Voltage (V)	3
Nominal Capacity (mAh)*	30
Nominal Discharge Current (μA)	200
Charge, Discharge Cycle Lifetime	
Discharge Depth of 10%	1500 (3.0 mAh discharge) (total capacity 4500 mAh)
Discharge Depth of 100%	40 (30 mAh discharge) (total capacity 1200 mAh)
Operating Temperature Range (deg. C)	-20 to +60
Weight (g)**	1.7
Dimensions (mm)**	
Diameter	20
Height	1.6
UL Recognition	MH12568

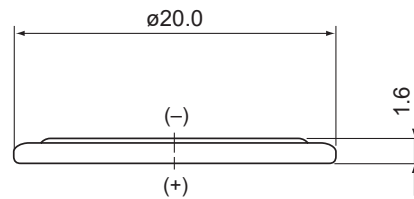


Characteristics


● Charge Property

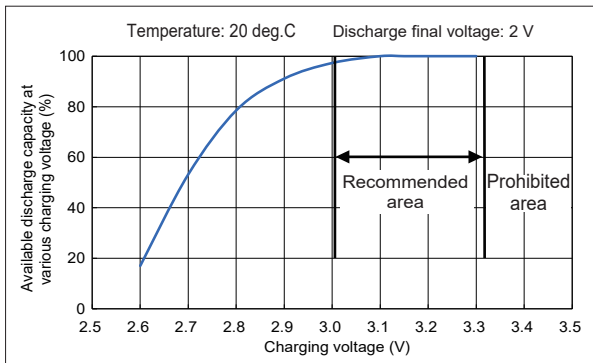


● Discharge Characteristics

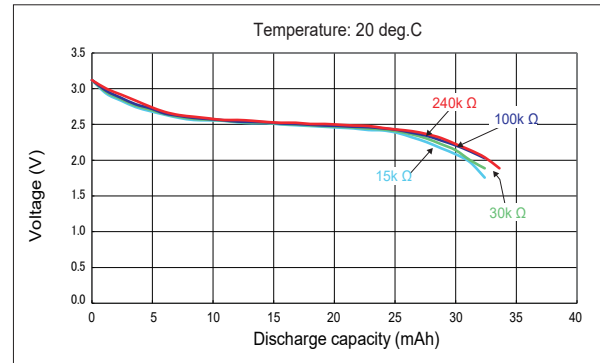

● Temperature Characteristics

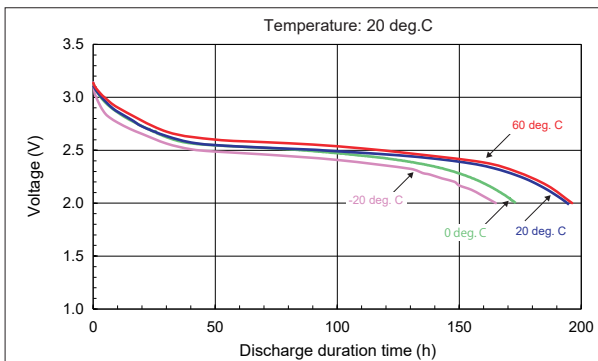

● Relationship between Discharge Current and Duration Time

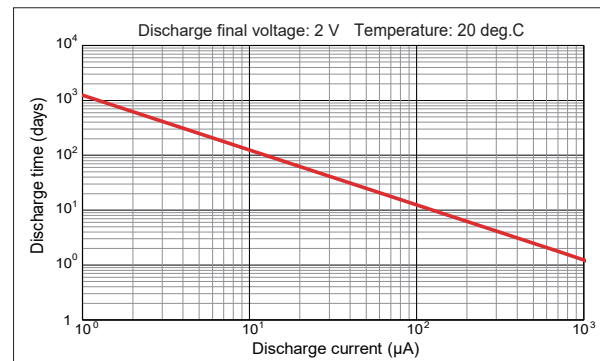

* Nominal capacity indicates duration until the voltage drops to 2.0 V when discharged at a nominal discharge current at 20 deg. C.


** Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.

Data Sheet

ML2016H

Characteristics

● High Rate Discharge Characteristics

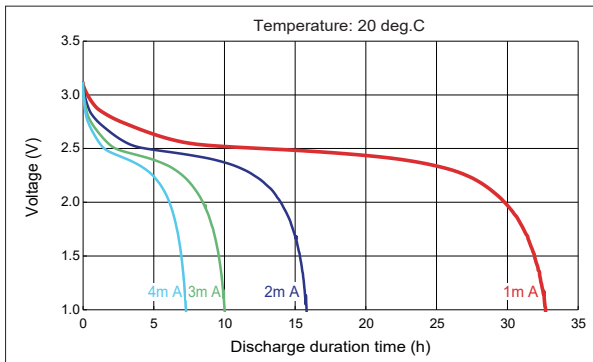

● Storage Characteristics

