


Model
System
Nominal Voltage (V)
Nominal Capacity (mAh)*
Nominal Discharge Current (μA)
Charge, Discharge Cycle Lifetime
 Discharge Depth of 10%
 Discharge Depth of 100%
Operating Temperature Range (deg. C)
Weight (g)**
Dimensions (mm)**
 Diameter
 Height
UL Recognition

ML2032
 Li-Al Alloy Manganese Dioxide/Organic Electrolyte
 3
 65
 200


 1000 (6.5 mAh discharge) (total capacity 6500 mAh)
 30 (65 mAh discharge) (total capacity 1950 mAh)
 -20 to +60
 3.0

20
 3.2
 MH12568

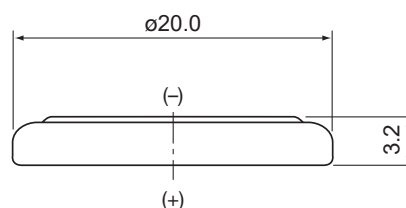


Characteristics


● Discharge Characteristics

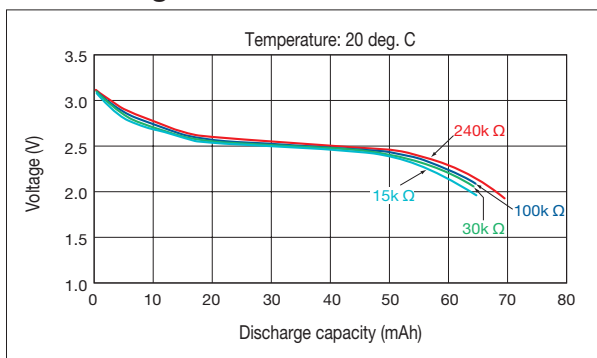


● Temperature Characteristics

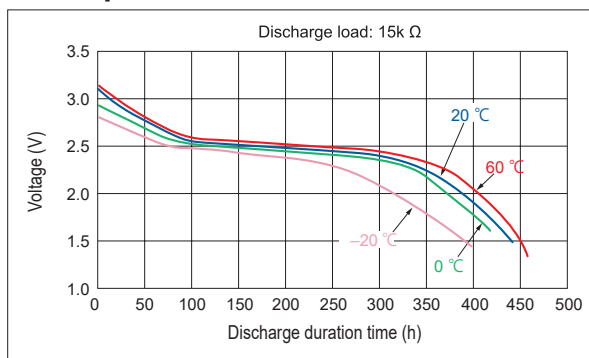

● Relationship between Discharge Current and Duration Time

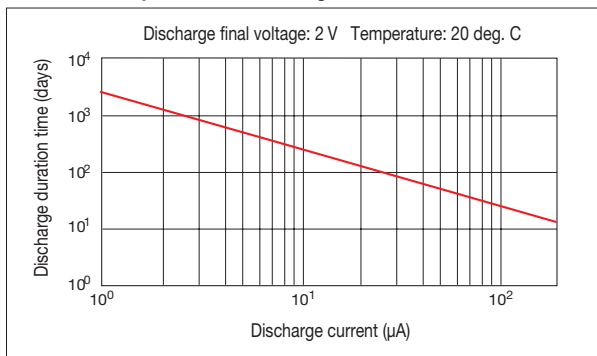

● High Rate Discharge Characteristics

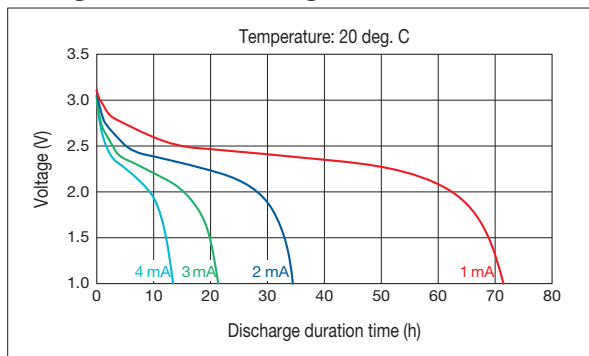


* Nominal capacity indicates duration until the voltage drops to 2.0 V when discharged at a nominal discharge current at 20 deg. C.


** Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.

Characteristics


● Over Charge Characteristics

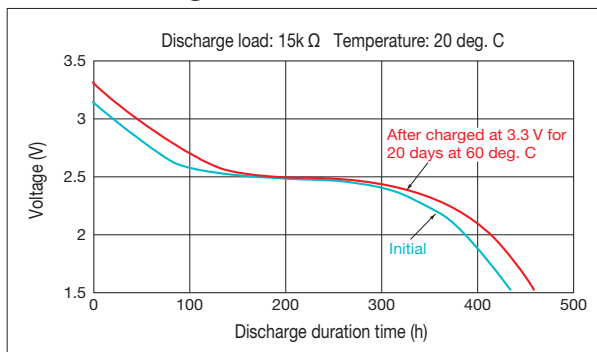

● Storage Characteristics

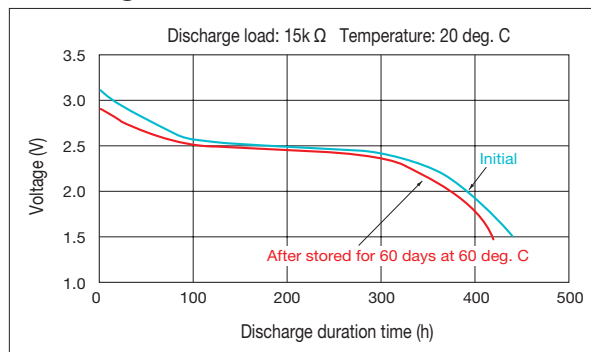

● Charge/Discharge Cycle Performance

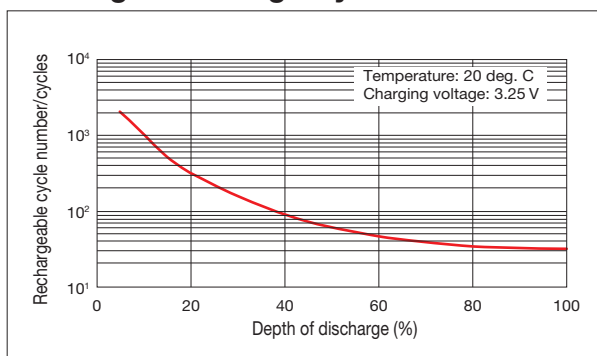

● Self-discharge Characteristics

