




# M.A.P. system

## Pipe & Wall Sealer by Maxell

The primary and differentiating feature of Maxell Airtight Products(M.A.P.) and flashing materials is "Quick and easy to install".

Pipe & Wall Sealer is an airtight and waterproof adhesive sheet to be applied to pipes that pass through the envelope of buildings.

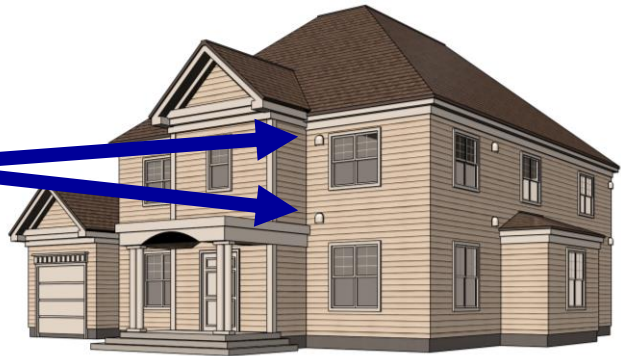

### How to Use



Press it over the pipe



Peel & Stick




The finish  
is perfect!!

That's it !!!




Construction is  
completed in  
about 30sec

# Structure

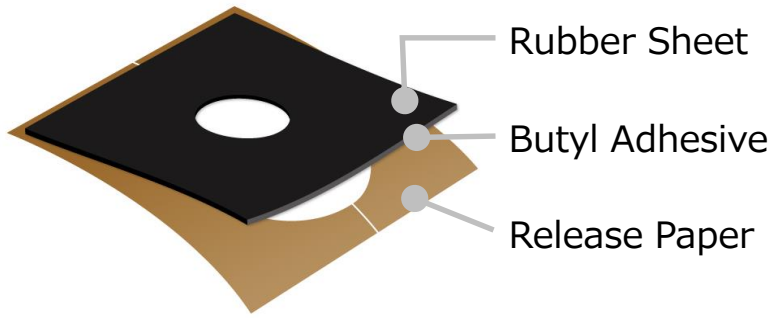

Front Side

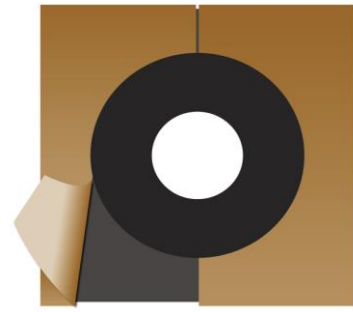

Back Side

Thickness : 74mil(1.88mm)

**Complies with  
AAMA711-13**

## Properties

Properties		Pipe & Wall Sealer
Adhesion	Plywood	12.7 lbf/in
	Vinyl	11.6 lbf/in
	OSB	10.4 lbf/in
	Dens Glass Gold®	10.8 lbf/in
Application temperature※1		32F~(0C~)
Service temperature※2		14~176F(-20~80C)

※1 When using at 32F or less, warm Pipe & Wall Sealer with a dryer before using.

※2 Pipe & Wall Sealer should be installed in conditions above 32F(0C).

## Product Lineup

We have a diverse lineup for pipe penetrations used in single family and commercial applications.

Part #	7700	7705	7710	7715	7720	7730	7750
Applied Nom. Pipe	1/4~ 3/8	1/2~ 3/4	1	1-1/4 ~ 1-1/2	2~ 2-1/2	3~4	5~6

Distributor : Interra USA, Inc. <http://www.interra-usa.com/>

add: 900 SW 16<sup>th</sup> Street Suite 125, Renton, WA, 98057

E-mail:[info@interra-usa.com](mailto:info@interra-usa.com) Tel:1-425-277-7850



Manufacturer : Maxell, Ltd.

<https://biz.maxell.com/en/>

Made in JAPAN

For more details,  
please visit our Website