



<b>Model</b>	CR2032H
<b>System</b>	Manganese Dioxide–Li/Organic Electrolyte
<b>Nominal Voltage (V)</b>	3
<b>Nominal Capacity (mAh)*</b>	240
<b>Nominal Discharge Current (mA)</b>	0.2
<b>Operating Temperature Range (deg. C)**</b>	-20 to +85
<b>Weight (g)***</b>	3.0
<b>Dimensions (mm)***</b>	
Diameter	20.0
Height	3.2
<b>UL Recognition</b>	MH12568

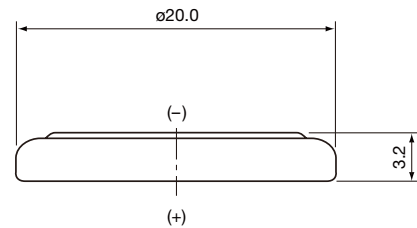


## Characteristics


### ● Discharge Characteristics

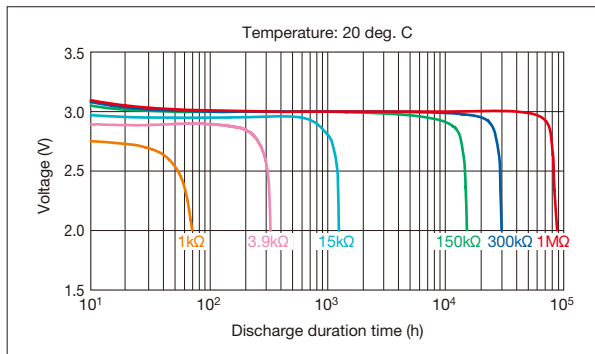


### ● Temperature Characteristics

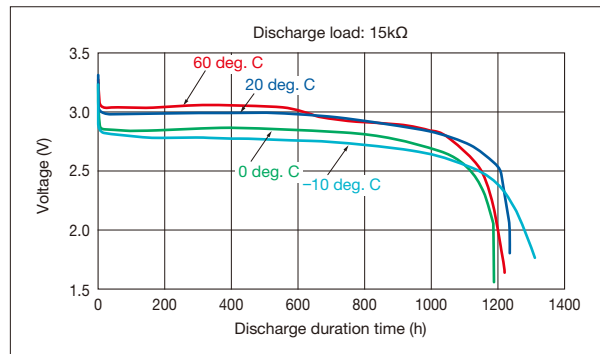

### ● Minimum Voltage of Pulse Discharge

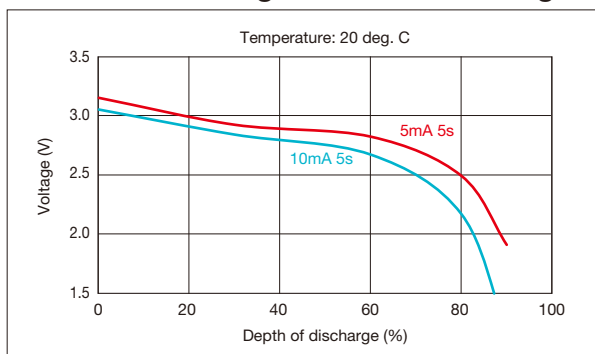

### ● Relationship between Discharge Current and Discharge Capacity

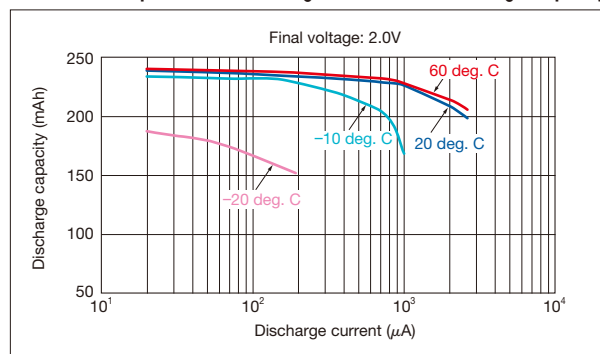

\* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.  
 \*\* When using these batteries at temperatures outside the range of 0 to +40 deg. C, please consult Maxell in advance for conditions of use.  
 \*\*\* Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.