



<b>Model</b>	CR1220
<b>System</b>	Manganese Dioxide–Li/Organic Electrolyte
<b>Nominal Voltage (V)</b>	3
<b>Nominal Capacity (mAh)*</b>	36
<b>Nominal Discharge Current (mA)</b>	0.1
<b>Operating Temperature Range (deg. C)**</b>	-20 to +85
<b>Weight (g)***</b>	0.8
<b>Dimensions (mm)***</b>	
Diameter	12.5
Height	2.0
<b>UL Recognition</b>	MH12568

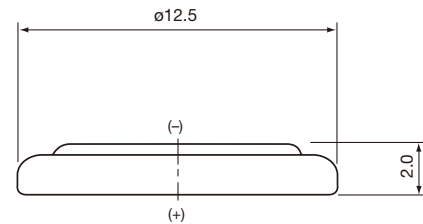


### Characteristics


#### ● Discharge Characteristics

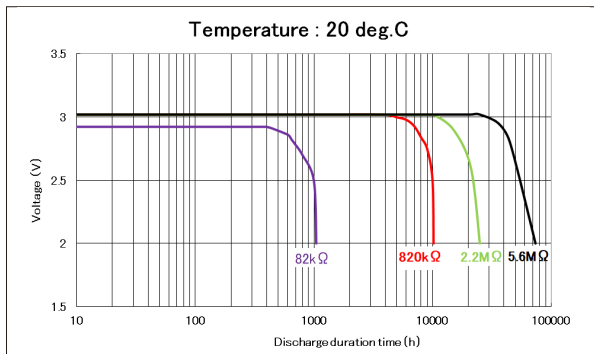


#### ● Temperature Characteristics

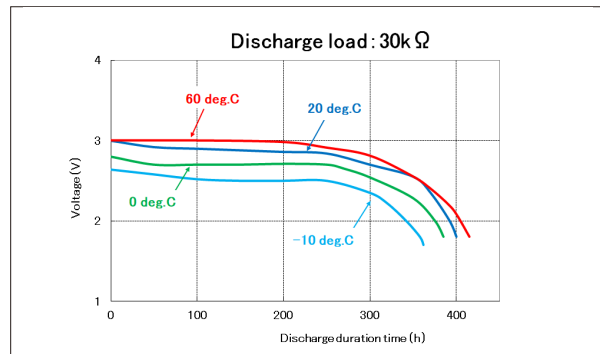

#### ● Pulse Discharge Characteristics

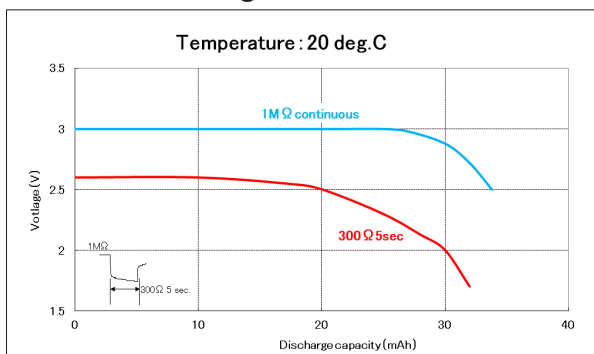

#### ● Relationship between Discharge Current and Discharge Capacity

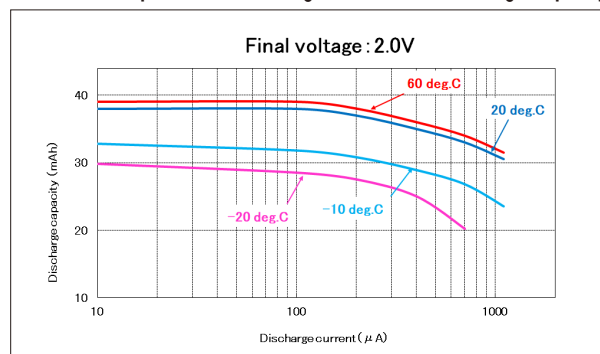

\* Nominal capacity indicates duration until the voltage drops to 2.0 V when discharged at a nominal discharge current at 20 deg. C.

\*\* When using these batteries at temperatures outside the range of 0 to +40 deg. C, please consult Maxell in advance for conditions of use.

\*\*\* Dimensions and weight are for the battery itself, but may vary depending on terminal specifications and other factors.